

## DISAB Industrial Cleaning Machines



### Suction unit DISAB CompVac™

**COMPVAC is an electrical powered suction unit mounted on a rigid stand equipped with retractable legs. COMPVAC is designed for mobile use and for such cases when collection of material into open skip or container is requested. The unit is primarily used for rental applications, but is also suitable for fixed installations.**

COMPVAC is an electrical powered suction unit mounted on a rigid stand equipped with retractable legs. The retractable legs make it easy to adjust the discharge outlet height over ground, to fit the type of open skip or container the customer prefer to use. The unit is in most applications used as a free standing suction unit, only with the connection of a 3" or 4" hose.

However the unit is also suitable for fixed installations, connected to a fixed installed pipe system with multiple suction outlets.

#### WHY COMPVAC

- Robust unit for temporary mobile use
- Manual discharge into any type of open skip.
- Power alternatives 12,5 or 16,5 kW
- CEE power intake for 32 or 63 A respectively
- Filter system for dry and moist material
- Automatically ATM filter cleaning system, no compressed air
- Complete start/stop and controls system
- Retractable legs
- Various options of safety filters

#### OPTIMAL SOLUTION

A common fork lift is usually available at most industrial companies and this is normally what is used for site transportation of the unit. Also normally customer owned skips for open collection of material are available. As the unit is designed with a sharp angled internal hopper, and equipped with a side mounted door for discharge, collected material is easily sliding out of the unit at discharge.

This is why COMPVAC is a suitable choice when large amount of material shall be vacuumed. The high suction capacity together with its flexible discharge system makes the unit very useful in most vacuum cleaning situations. Due to its flexibility the COMPVAC units also gets access to most areas where cleaning needs to be carried out without the use of fixed pipe network.

#### OPERATION

The vacuumed material is first separated in a special designed fall chamber hopper with inlet wear protection. In this section all heavier or larger material will by gravity fall into the bottom of the hopper. From this section the air stream will continue to the main filter system, where the remaining fine airborne dust will be separated. Collected material from both the above sections is commonly collected in the conical hopper in the unit.

Discharge of material is made via the manual operated side door at the side of the hopper.

Cleaning of filters is automatically and executed by a filter cleaning valve (ATM) located between the filter and the vacuum pump. When this valve is activated and opens up, a counter flow of air is sucked in backwards through the filter bags, thus cleaning all filter bags simultaneously in a very short period. There after the valve is closed again. Cleaning intervals are normally each 30 minutes, and lasting for only app. 20 seconds after which full vacuum is restored. This valve also ensures that when the unit is started it starts unloaded, and vacuum load is introduced app. 10 seconds after start.



All functions for the operation of the unit is controlled from the built in electrical panel.

#### TYPICAL APPLICATIONS

COMPVAC is in first hand designed for temporary vacuum/cleaning needs, where the vacuumed material shall be collected in open skips or container. At the same time the unit shall be robust, powerful and easy to transport at site. The unit is aimed for general cleaning, collection of spillages, or similar.

#### TYPICAL USERS

Concrete- and cement industry, chemical industry, steel- and aluminium works, paper- and pulp industry, sawmills, wood pellets, plastic industry, shot blasting- and surface treatment industry, bakeries, incineration- and power plants, etc

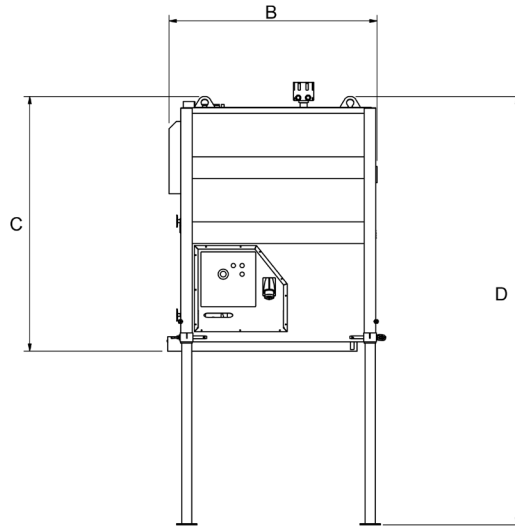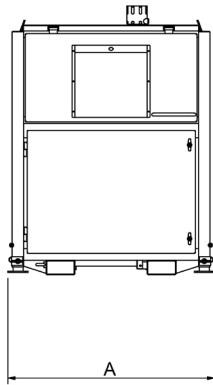

## Suction unit DISAB CompVac™

### VACUUM PUMP

The vacuum producer is a turbo pump of side channel blower type, with direct coupled motor. Pump and motor is mounted on an anti-vibration support and to the steel structure of the unit.

Vacuum pump is equipped with a spring loaded safety vacuum valve, preventing the unit from exceeding its maximum operating vacuum level.

Inlet- and outlet silencers secures low noise operation.

### FILTER SYSTEM

The filter compartment contains a cassette filter with flat filter bags. Filters are made from special treated polyester needle felt. Service of filters is easy accessible from the clean gas side and from the outside of the unit.

The unit is equipped with a vacuum assisted ATM (air-repulse) filter cleaning system. When activated, a large air inlet will ensure a fast backwards air direction through all the filter bags simultaneously, thus in an efficient way knocking off collected dust from the filter surfaces.

Filter Surface: 10 m<sup>2</sup>

### DUST BIN

Type: Conical hopper

Hopper volume: 0,7 m<sup>3</sup>

Discharge door: Large side mounted, dust tight door

Discharge: Manual operated

### MISCELLANEOUS

Filter class: L.M. IEC EN 60335.2-69

Electrical: IP 65, 3x400V 50Hz. incl. Star/Delta-start, motor over load, vacuum meter

Dust inlet: 108 mm

Steel: S 235 JG2

Painting: Class C 2 , colour RAL 3003 red

### OPTIONS

- DP-Gauge with Ball Valve
- Level Control; Paddle type
- Level Control; Vibrating type
- Line (Circuit) Breaker
- Pre Designed for Remote Control 24 V
- Radio Remote Control ( CE, Carrier wave interr.)
- Timer Auto Stop
- Control Filter 10 m<sup>2</sup>
- DP-Switch, control filter

Item/Model		COMPVAC-125	COMPVAC-165
Dimensions, mm	A	1430	1430
	B	1440	1440
	C	1763	1763
	D	2966	2966
Weight, kg (empty)		930	1030
Max Vacuum, mbar		290	400
Max. Air Volume m <sup>3</sup> /h (unloaded)		1100	1100
Electrical Motor, kW		12,5	16,5
Voltage Frequency, V/Hz		400/50	400/50
Filter surface, m <sup>2</sup>		10	10
Noise Level dB(A) (at 1m / 5m distance)		75/70	75/70
Dimension dust inlet, dia mm		108	108
Lay out drawing		SD-10042	SD-10042

We reserve the right to alter any design of the unit without prior notice.

#### Manufacturer:

**DISAB-TELLA AB**  
Cedersdalsvägen 1  
SE-186 40 Vallentuna  
Sweden

Tel: +46 (0) 8 514 505 70  
Fax: +46 (0) 8 511 754 66  
E-mail: industrial@disab.com  
www.disab.com

#### Distributor: