


DISAB Vacloaders

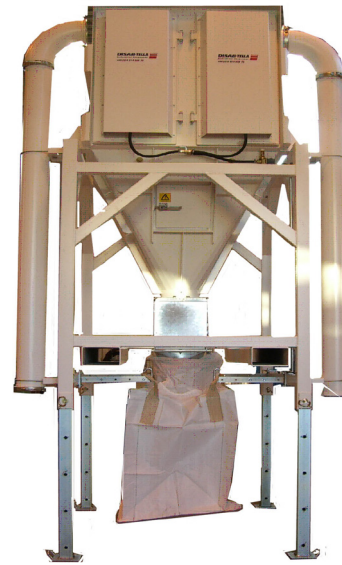

VACTURION PreBagF

PreBag F offer the following design:

- Drawing C-20989
- 30 m³ filter surface with automatic ATM vacuum controlled filter cleaning (no compressed air)
- Filter bags class M according to standard EN 60335- 2-69, IEC 60335-2-69
- Filter Separator is designed for 800 mbar (80% vacuum)
- Dust bin volume approx. 1000 litres
- Telescopic legs. Can be raised approx 1000 mm
- Flap valve discharge. Valve automatic discharge via control on cabinet or by manual handle
- Big-bag connection with air relief filter for not dusting at discharge
- 24 VDC control box with controls for power supply from truck
- Hose connections, dust inlet and clean gas outlet dia. 203 mm (8") DISAFLOW as standard
- Painting system C2, RAL colour upon customer request

OPTION:

- Bin level control switch paddle 24 VDC (vacuum relief at alarm)

We reserve the right to alter any specifications without prior notice